
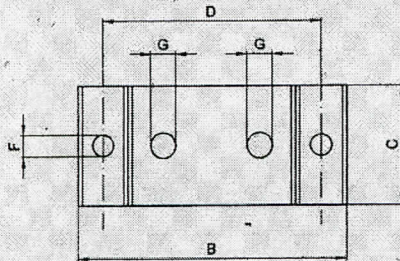


# TECHNICAL SPECIFICATIONS

## DATI TECNICI

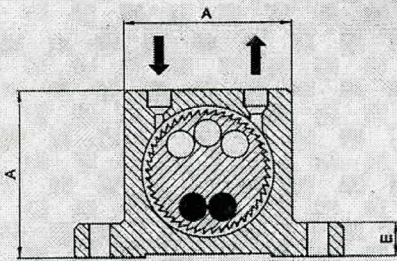

No lubrication is required  
Non necessita lubrificazione

Filtered air is required - Si richiede aria filtrata

Noise level - Livello di rumore  
60 - 75 dB-A

Maximum temperature - Massima temperatura  
110°C = 230°F

TYPE TIPO	A		B		C		D		E		F		G	WEIGHT - PESO	
	[mm]	[in]	[mm]	[in]	[mm]	[in]	[mm]	[in]	[mm]	[in]	[mm]	[in]		[Kg]	[lb]
VT 8	50	1,97	86	3,39	33	1,30	68	2,68	12	0,47	7	0,28	1/8"	0,25	0,55
VT 10														0,26	0,57
VT 12														0,27	0,59
VT 13	65	2,56	113	4,45	42	1,65	90	3,54	16	0,63	9	0,35	1/4"	0,57	1,25
VT 16														0,58	1,28
VT 19														0,60	1,32
VT 20	80	3,15	128	5,04	56	2,20	104	4,09	16	0,63	9	0,35	1/4"	1,09	2,40
VT 25														1,12	2,46
VT 29														1,20	2,64
VT 30	100	3,94	160	6,30	73	2,87	130	5,12	20	0,79	11	0,43	3/8"	2,20	4,84
VT 36														2,30	5,06
VT 40														2,50	5,50

TYPE TIPO	Vibrations per minute Vibrazioni al minuto			Centrifugal force Forza centrifuga						Air consumption per minute Consumo d'aria al minuto					
				2 bar - 29 PSI		4 bar - 58 PSI		6 bar - 87 PSI		2 bar - 29 PSI		4 bar - 58 PSI		6 bar - 87 PSI	
	29 PSI	58 PSI	87 PSI	N	lb	N	lb	N	lb	ltr.	CF	ltr.	CF	ltr.	CF
VT 8	35.000	41.000	45.100	980	220	2030	455	2860	641	45	1,6	78	2,8	105	3,7
VT 10	27.000	34.000	36.400	830	186	1370	307	2360	529	45	1,6	78	2,8	105	3,7
VT 12	16.500	22.300	24.300	640	144	1330	298	1920	431	45	1,6	78	2,8	105	3,7
VT 13	25.500	29.000	32.000	1380	309	2400	538	3670	823	118	4,2	197	7,0	286	10,1
VT 16	16.500	20.800	23.000	1220	274	2060	462	3100	695	118	4,2	197	7,0	286	10,1
VT 19	11.000	14.500	16.000	1080	242	1870	419	2660	597	118	4,2	197	7,0	286	10,1
VT 20	16.000	18.900	22.000	2140	480	3980	893	5440	1220	182	6,4	323	11,4	453	16,0
VT 25	11.500	14.800	16.300	2080	466	3460	776	4990	1119	182	6,4	323	11,4	453	16,0
VT 29	7.500	9.700	11.000	2200	493	3550	796	4800	1076	182	6,4	323	11,4	453	16,0
VT 30	12.500	13.500	15.800	3330	747	5350	1200	7400	1660	328	11,6	522	18,4	735	26,0
VT 36	8.000	9.800	12.500	3250	729	5280	1184	7080	1588	328	11,6	522	18,4	735	26,0
VT 40	6.000	7.100	8.200	4040	906	6100	1368	7380	1655	328	11,6	522	18,4	735	26,0

The specifications could be modified every time without obligation for this company  
I dati riportati possono subire variazioni in qualsiasi momento senza obblighi da parte nostra